




# NCCM<sup>®</sup> CX-Plus

*Chemically-Resistant Nonwoven Rolls*

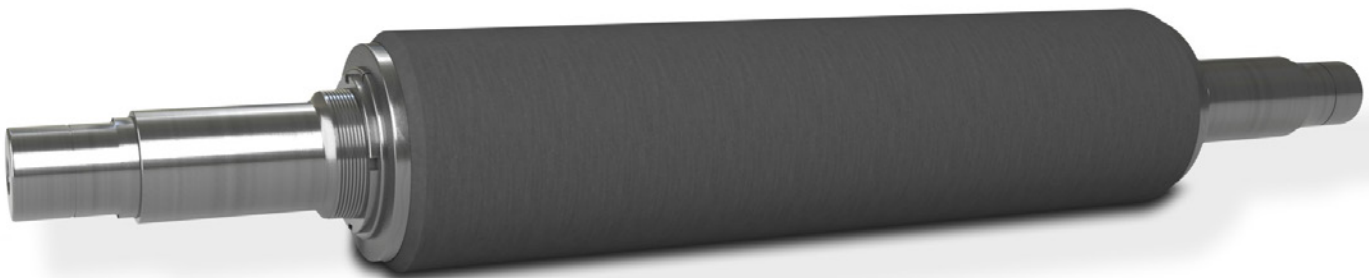


**Advanced solutions for caustic, alkaline and acidic applications**



# NCCM® CX-Plus

Advanced solutions for caustic, alkaline and acidic applications

NCCM® CX-Plus rolls excel in environments with higher temperature and pressure requirements than the NCCM® CX roll can service. Long life and cut resistance separate the CX-Plus nonwoven from traditional materials that wear and break down quickly.

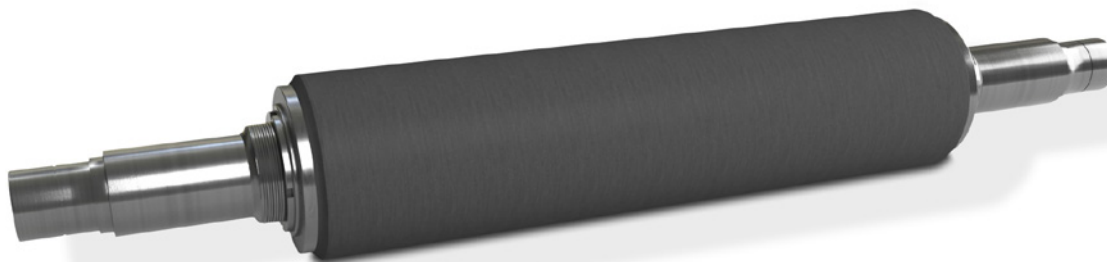

## TECHNICAL INFORMATION:

NCCM CX-SERIES PRODUCT

**NCCM® CX-Plus**  
Chemically-Resistant Nonwoven Rolls  
Advanced solutions for caustic, alkaline and acidic applications

Primary Metals: APL (Anodizing & Pickling Lines), BAL (Bright Anodizing Lines), CAL (Bright Anodizing Lines), CCL (Continuous Anodizing Lines), CCL (Coil Coating Lines), CTL (Coil Coating Lines), CCL (Coil Coating Lines), CL (Continuous Glazing Lines), CPL (Coil Coating Lines), CRM (Continuous Pickling Lines), DI (Cold Rolling Mills), DPL (Dry Polishing Lines), ECL (Electrolytic Cleaning Lines), ECL (Electrolytic Cleaning Lines), ETL (Electrolytic Cleaning Lines), GL (Grinding Lines), HDGL (High-Density Grinding Lines), LM (Lamination Lines), OCL (Oven Coating Lines), PL (Pickling Lines), PL (Pickling Lines), PL (Pickling Lines), RM (Reversing Mills), SPM (Strip Pickling Mills), TL (Temper Mills), TLL (Temper Mills), TM (Temper Mills)

Long-life roll for **HIGHER PRESSURE AND TEMPERATURE** demanding chemical applications and positions

This chart is meant to give an overview and does not provide any formal guarantees for any line. Please contact an NCCM representative for further recommendations and technical support.

NCCM CX-SERIES PRODUCT

**NCCM® CX-Plus**  
Chemically-Resistant Nonwoven Rolls  
Advanced solutions for caustic, alkaline and acidic applications

Wringing, Dilling, Blank Washing, Tension/Brake, Smubber, Braille, Cradle, Deflector, Pinch/Feeder, Table/Conveyor, Vacuum

Long-life roll for **HIGHER PRESSURE AND TEMPERATURE** demanding chemical applications and positions

This chart is meant to give an overview and does not provide formal guarantees for any application. Please contact an NCCM representative for further recommendations and technical support.

<b>NCCM® CX-Plus</b>	DENSITIES 5CXP and 7CXP	OPERATIONAL pH pH range 0-14
	SIZES Max. rolls size: 647,7mm (25.5") OD; 457,2mm (18") ID Min. roll size: 50,8mm (2") OD; 25,4mm (1") ID	MAX TEMPERATURE 116°C (240°F)
		MAX OPERATING PRESSURE 17N/mm (98 PLI)

All application parameters are relative to specific applications and do not provide formal guarantees. Please contact an NCCM representative for further insight and questions on sizes, parameters and requirements.

**NCCM® CX-Plus**


**FEATURES**

- Resistant to chemicals in high temperatures and pressures
- Longest life compared to any other chemical roll
- Repairability
- Chemical fluid control
- High coefficient of friction
- Self-healing
- Cut resistant
- Porosity

**BENEFITS**

- Reduced replacement cost
- Reduced inventory cost
- Reduced maintenance cost
- Reduced fluid usage/cost
- Reduced fluid contamination
- Increased line uptime
- Increased line speed

Please contact an NCCM representative for additional information on features and benefits.

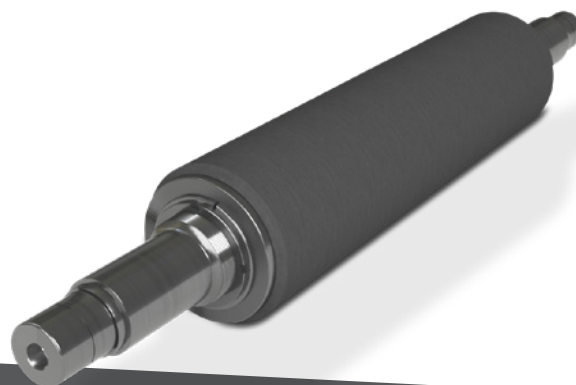

CONNECT in f t o

All rights reserved. Please recycle. Printed in U.S.A. Issued: 7.30 © NCCM 2019. B11-ENG-CXP-V1 NCCM® is a registered trademark of NCCM Company

For more information visit us online at [NCCMCO.com](http://NCCMCO.com) or contact us at [sales@nccmco.com](mailto:sales@nccmco.com)